



RT7-120VDC/6kW Specification

The RT7-120VDC/6kW is a 3 phase, active power factor corrected, switched mode rectifier (SMR) module designed to provide up to 6kW of output power (60A limit) into a 120VDC nominal system. This rectifier is primarily used in conjunction with a battery to provide an uninterruptible or standby DC power system. Up to 20 rectifiers can fit in a rack and up to 225 rectifiers can be configured as a system using one control and supervisory unit. The system can be monitored and controlled remotely using WinCSU software.

Illustrated is a single rectifier module.



Operating characteristics, RT7-120VDC/6KW at 25°C ambient, 400VAC, 50Hz unless otherwise stated:

Input

Voltage:

Three phase, three wire and Earth
400 +32/-20% VAC (320VAC - 530VAC)
Phase to phase delta connection;
Tolerable phase imbalance 10%
(Measured L-L as defined by IEEE/IEC)
Voltage withstand 575VAC line-line indefinitely;

Current:

13A RMS max line current at 320VAC;
10A RMS line current at 400 VAC;
Sinusoidal waveform;

Frequency:

45 - 66Hz;

Phase Rotation:

Insensitive to Phase Rotation

Inrush Current:

< 16A peak at nominal mains voltage;

Soft Start:

Output current ramp-up time 8 seconds to 50A;

Protection:


HRC fuses at input of SMR; power circuit is turned off if the AC voltage exceeds ~535VAC or falls to less than ~315VAC; unit re-activates when AC voltage is within approximately 340 – 510 VAC; input inrush limiting circuit prevents high surge currents when connecting to a live AC bus;

Voltage Withstand Test:

1500VAC input to chassis for 1 minute;
(2200VDC 100% testing on production units);


Power Factor:

> 0.98 for >50% output power;
> 0.99 for 100% output power;

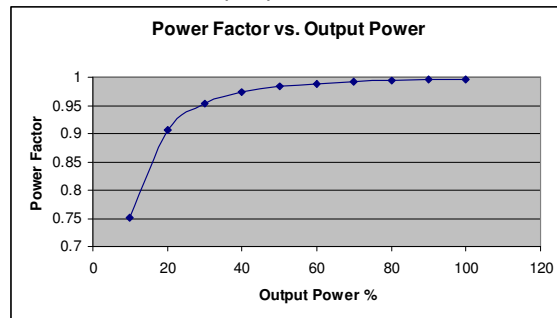

Efficiency:

Typically >91% at > 40% output power;

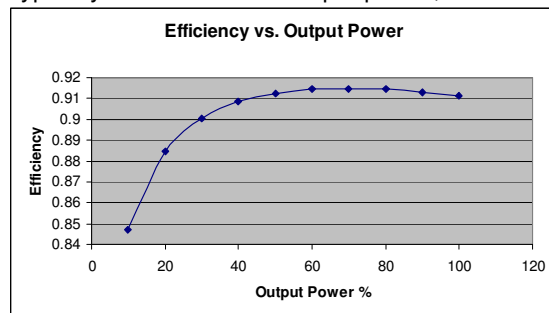

Harmonic Distortion:

Current THD < 5% typically at full output power when operated with mains voltage THD < 2%; (±1% phase imbalance)





RT7-120VDC/6kW Specification

Output

Voltage:

Float: 100 – 160V
Equalise: 110 – 175V


Current Limit:

Range 6 - 60A

Power Limit:

Current limit is automatically reduced in inverse proportion to output voltage above 100VDC to limit output power to 6 kW (min);

Max. current: 60A at 100V
50A at 120V
40A at 150V
34A at 175V

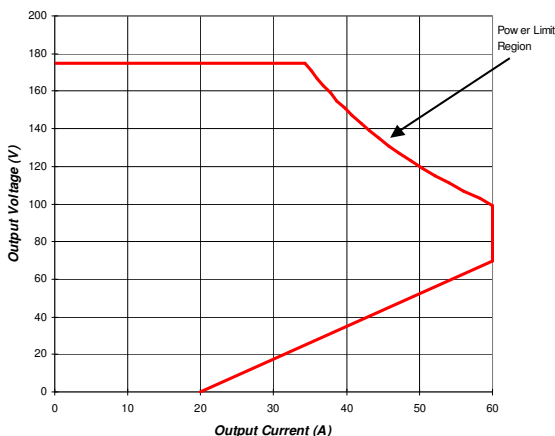

*60A current limit automatically reduces by 0.6A/°C for heatsink temperatures above 60°C.

Voltage Withstand Test:

1000VAC output to chassis for 1 minute;
(1500VDC 100% testing on production units);

Conversion Frequency:

>20kHz;

Static Regulation:

Line: better than ± 0.05%;

Load: terminal voltage drops by 1.2V ± 0.1V from zero to 50A load (for passive current sharing) for stand-alone units, or regulates to better than ±0.05% for MiniCSU controlled units;

Dynamic Regulation:

± 5% for 10% to 90% to 10% step load change;
± 1% of final value within 100ms of step change;
± 1% for a 25% step change in AC input voltage;

Noise:

< 250mV RMS (100Hz – 10kHz);
< 25mV RMS (10kHz – 100MHz);
< 500mV peak to peak (10kHz – 100MHz);

Load Sharing:

Better than ± 5% of full scale with active current sharing from MiniCSU;

Protection:

Fuse at output of SMR;

Soft start circuit prevents surges when connection is made to a live DC bus;

Overvoltage - only faulty unit shuts down;

Overcurrent - can sustain short circuit at output terminals indefinitely. Output current starts folding back when output voltage drops below 70V to less than 20A at zero terminal voltage;

Over-temperature - gradual reduction of power limit if heatsink temperature exceeds pre-set limit;

Remote Controls

Equalise Mode:

Equalise mode is initiated by a signal from the MiniCSU;

Rectifier Inhibit:

Rectifiers can be inhibited by a signal from a remote WinCSU terminal, transmitted via the MiniCSU;

External Digital Voltage Control (EDVC):

The MiniCSU uses the optically coupled communications lines to digitally control rectifier Float and Equalise voltages over a limited voltage range in order to adjust battery voltage for temperature and voltage drop in DC bus, limit the maximum battery recharging current and to achieve active current sharing;





RT7-120VDC/6kW Specification

SMR parameters programmed by MiniCSU

In the SMR menu on the MiniCSU:

- Current Limit
- High Voltage Shut-Down (HVSD)
- High Voltage Alarm
- Low Voltage Alarm
- HVSD Reset

In the Battery menu on MiniCSU:

- Float Voltage
- Equalise Voltage

Test Function: (when activated on MiniCSU)

Test function causes all rectifier LEDs to flash.

Alarms and Monitoring

Front Panel LED condition table:

Green	Yellow	Red	Condition
0	0	0	No AC power
F*	0	0	Primary power bad
1	0	0	Normal
1	F*	0	Alarm
1	1	0	Equalise
0	F*	1	Shutdown
0	0	1	µP fault

Note: F* indicates flashing LED.

- Primary power bad:** Indicates the input AC is too low or too high, or the primary circuit is faulty;
- Normal:** Status is normal;
- Alarm:** See Alarm table;
- Equalise:** SMR is in equalise mode;
- Shutdown:** SMR is shut down by remote control, or there is an internal control circuit fault;
- µP fault:** Internal micro-controller is faulty.

SMR status monitoring:

MiniCSU and WinCSU monitor status of the SMR:

- Output current of SMR;
- Temperature of heatsink of SMR;
- Software version of SMR;

Current:

Monitored on MiniCSU and WinCSU with 1A resolution; Analog measurement accuracy ± 1% at full load; Optional bar-graph display on rectifier;

Voltage:

System voltage normally displayed on MiniCSU alphanumeric LCD display. Accuracy ± 0.5%

SMR address:

The SMR address is automatically set by resistors in the magazine

SMR alarm monitoring:

The table shows alarm conditions that are monitored by the SMR and are displayed on both MiniCSU and WinCSU. The mnemonics listed here appear on WinCSU, but full alarm description appears on MiniCSU;

Vh *	Output voltage too high
VI *	Output voltage too low
Il *	Unit is in current limit
Po *	Unit is in power limit
Th *	Heatsink temperature high and thermal limit is active
Nd *	No demand
Lo *	Low output current, less than 8A
Ma *	Operating parameters out of range (or eeprom fault)
Sd	Unit is shut down by remote command - user shutdown
Mr	Internal voltage reference faulty
No Response	SMR communication fault. Generated within MiniCSU
Vs	High voltage shut down (output), latched alarm. User setting or fault
Unit Off / Off (WinCSU)	Unit is shut down due to AC out of range or SMR primary circuit fault. (normal operation or fault)
Ts	Temperature sensor fault
Dc	Converter feedback fault, latched alarm
Ff	Fan failure

Note: * indicates flashing of LED on SMR.





RT7-120VDC/6kW Specification

Compliances

Safety: Designed to IEC60950; AS/NZS 60950; (with European group difference); UL60950

EMC Emissions and Immunity: Designed to ETSI EN 300 386 with class A emissions

Environmental: ETSI EN 300 019

EMC Test Levels

Emissions:

<i>Category:</i>	<i>Tested to comply with:</i>	
Harmonics	IEC 61000-3-2	<i>Class A</i>
Flicker	IEC 61000-3-3	
Conducted RF	AC Terminals: CISPR 22; DC Terminals: CISPR 22	<i>Class A</i> <i>Class A</i>
Radiated RF	CISPR 22; EN55022*; AS/NZS 3548*:	<i>Class A</i>

Immunity

<i>Category:</i>	<i>Tested to comply with:</i>	
Electrostatic Discharge (ESD)	IEC 61000-4-2 (Level 4: Air 15kV, Contact 8kV)	<i>Criterion A</i>
Radiated RF	IEC 61000-4-3 (Level 4: 10V/m, 1kHz 80% AM) ENV50204 - GSM Radiation (Mobile Phone) (Level 4: 10V/m, 100% AM, 50% duty)	<i>Criterion A</i> <i>Criterion A</i>
Electrical Fast Transient (EFT)	IEC 61000-4-4 (Level 4: 4kV on AC lines) (Level 3: 2kV on load and 1kV on comms lines)	<i>Criterion A</i> <i>Criterion A</i>
Surge Protection	ANSI C62.41-1991 category B3 - AC lines (Combination Wave 6kV/3kA; Ring Wave 6kV/500A) IEC 61000-4-5 (Impulse) (Level X: 6kV/3kA Common Mode [CM] on AC lines) (Level X: 6kV/3kA Differential Mode [DM] on AC lines) (Level 3: 2kV CM, 1kV DM on DC lines) IEC 61000-4-12 (Ring Wave) (Level X: 6kV/500A, 100kHz CM & DM on AC lines) (Level 3: 2kV CM, 1kV DM on DC lines)	<i>Criterion B</i> <i>Criterion B</i> <i>Criterion A</i> <i>Criterion A</i> <i>Criterion A</i>
Conducted RF	IEC 61000-4-6 (Level 3: 10V on AC, load and comms lines)	<i>Criterion A</i>
Voltage Dip, Interruptions	IEC 61000-4-11 (Level: 100% dip for 10ms) (Level: 30% dip for 500ms) (Level: 60% dip for 1000ms) (Level: 100% dropout for 5s)	<i>Criterion B</i> <i>Criterion B</i> <i>Criterion B</i> <i>Criterion B</i>





RT7-120VDC/6kW Specification

Environmental

Environmental Class (EN 300 019):

Operational: Class 3.3
(Stationary Use at Non-Temperature-Controlled Locations)

Transport: Class 2.3
(Public Transportation)

Storage: Class 1.2
(Weather Protected Non-Temperature-Controlled Locations)

Cooling:

Forced convection cooling using 80mm fans with variable speed temperature control and finger guards. Fans stop if AC power fails or rectifier inhibited remotely;

Temperature:

Operating range: -25 °C to +70 °C
Full power range: -25 °C to +50 °C
Derated operation: 50% power at +70 °C
Storage: -25 °C to +60 °C
Transport: -40 °C to +70 °C

The rectifier senses its internal heat-sink temperature and, if necessary, adjusts power limit in order to protect itself against over-heating;

Humidity:

Class 3.3: 0 to 100% RH condensing including dripping water and icing conditions

Altitude:

Operational to 4000m.(Consult factory above 4km)
Derate maximum ambient temperature by 5°C per 1000m above sea level.

Vibration:

Operational: 1.5mm displacement 2-9Hz,
5m/s² acceleration 9-200Hz,
Continuous, any direction.

Transport: (packaged) 3.5mm displacement 2-9Hz,
10m/s² acceleration 9-200Hz,
15m/s² acceleration 200-500Hz,
One hour, any direction.

Shocks:

Operational: 40m/s² half sine, 11ms duration,
Any direction

Transport: (packaged) 180m/s² half sine, 6ms duration,
Any direction

Drop Test:

Transport: 0.8m drop when packaged

Mechanical

Size:

Width: 441mm (17.35")
Height: 86mm (2U) (3.40")
Depth: 458mm (18.03")
Mass: < 19kg (42 lb)

Magazine size:

The RT7-48V/6KW magazine is installed in a standard 600mm (23.6") deep 19-inch rack and takes up 2U of height. No height needs to be left at the top and bottom of the rack.

Acoustic Noise:

< 55dB (A Weighted)

Connections

Input, Output, and Communications:

Connectors are mounted on the back of the rectifier module; with matching connectors located at the back of the magazine; mating of connectors occurs when unit is plugged into the magazine; the rectifier is mechanically secured to ensure reliable mating.





RT7-120VDC/6kW Specification

RT7-120VDC/6kW dimensions:

